
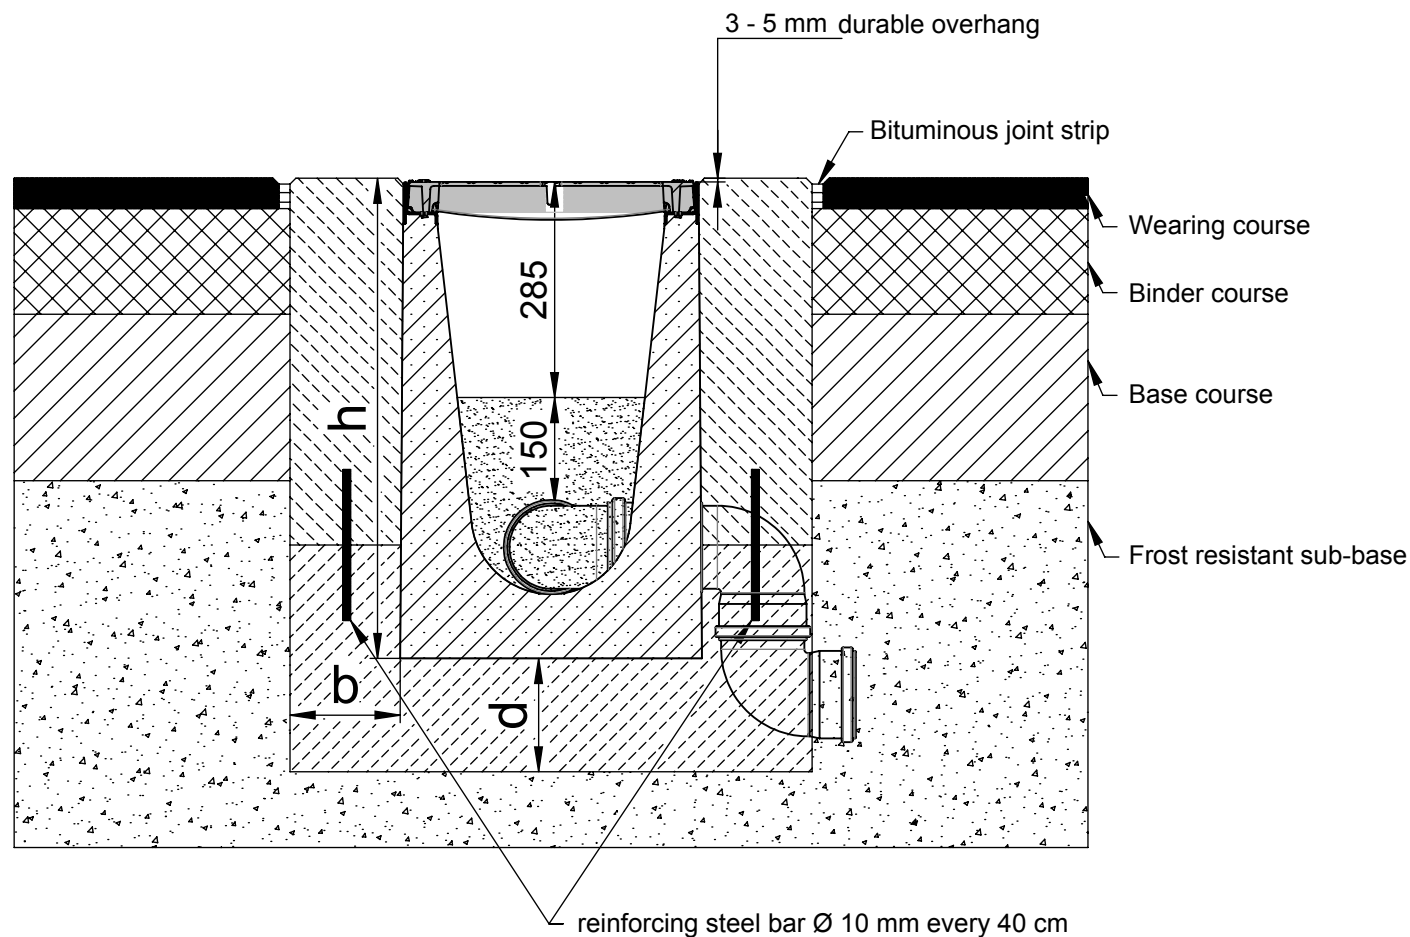


Installation example in asphalted areas class D 400 - F 900



* h = Channel height plus camber

Category according to EN 1433 / DIN 19580		A 15	B 125	C 250	D 400**	E 600	F 900	Applying to follwing systems: DRAINFIX CLEAN 300 DRAINFIX CLEAN 400	
Foundation: with b / thickness d / height h (in cm)					15 / 15 / *	15 / 20 / *	15 / 20 / *		
The named concrete quality is a minimum quality									
EN 206-1 / DIN 1045-2	quality of concrete stretcher				C 30/37 XF 4	C 30/37 XF 4	C 30/37 XF 4		
	with danger of frost on the lateral support				C 30/37 XD 1	C 30/37 XD 1	C 30/37 XD 1		
The installation examples / advise constantly are adapted to the technical conditions. With new editions older expenditures lose their validity. Before planning or installation please verify the current version at www.hauraton.com In building construction is a sealing layer below the channels necessary.		Condition: 14.08.2013			Our general installation instructions apply.			Format DIN A4	 Unit 4, Frenchs Avenue LU6 1BH Dunstable / Bedfordshire Tel. +44 1582 50 1380 Fax +44 1582 50 1399 technical@hauraton.co.uk
								scale 1:10	
** Not for use in continously frequented areas of carriageway or motorways as well as for areas frequented by busses or lorries/ trucks		92_0000057989 Einbaubeispiel www							
		DRF-Clean NW 300 Typ 01H verzinkte Zarge mit Gussrost Klasse D 400, Abgang links mit Substrat Einbaubeispiel Klasse D 400 in Asphalt							

** Not for use in continuously frequented areas of carriageway or motorways as well as for areas frequented by busses or lorries/ trucks