



# Installation Example

## Concrete Class E 600



Category according to EN 1433 / DIN 19580		A 15	B 125	C 250	D 400**	E 600**	F 900**	Applying to following systems:	
Foundation: width x / height y / thickness z (in cm)						15 / * / 20		RECYFIX HICAP Trash box 500	
EN 206-1 / DIN 1045-2  The named concrete quality is a minimum quality	quality of concrete stretcher					C30/37 XF4, XM1			
	without danger of frost on the lateral support					C25/30 X0			
	with danger of frost on the lateral support					C25/30 XF3			
The installation examples / advise constantly are adapted to the technical conditions. With new editions older expenditures lose their validity. Before planning or installation please verify the current version at <a href="http://www.hauraton.com">www.hauraton.com</a> In building construction is a sealing layer below the channels necessary.						Date: 02.08.2023		Our general installation instructions apply.	Format DIN A4
The installation example represents a proven recommendation from HAURATON. The final responsibility for the execution lies with the planner in charge. Specific conditions of the project must be taken into account.									scale 1:15
** Installation situations of drainage systems with high dynamic loads (e.g. airports, motorways and manoeuvring areas of buses, lorries and forklifts, etc.) are not sufficiently considered in DIN EN 1433. Please contact us for such applications to work out project-specific solutions.						0000066986_BRITISH.dwg		6	EBBw
						RF-HICAP-S-500 Einlaufkasten Einbaubeispiel Klasse E 600 in Beton			

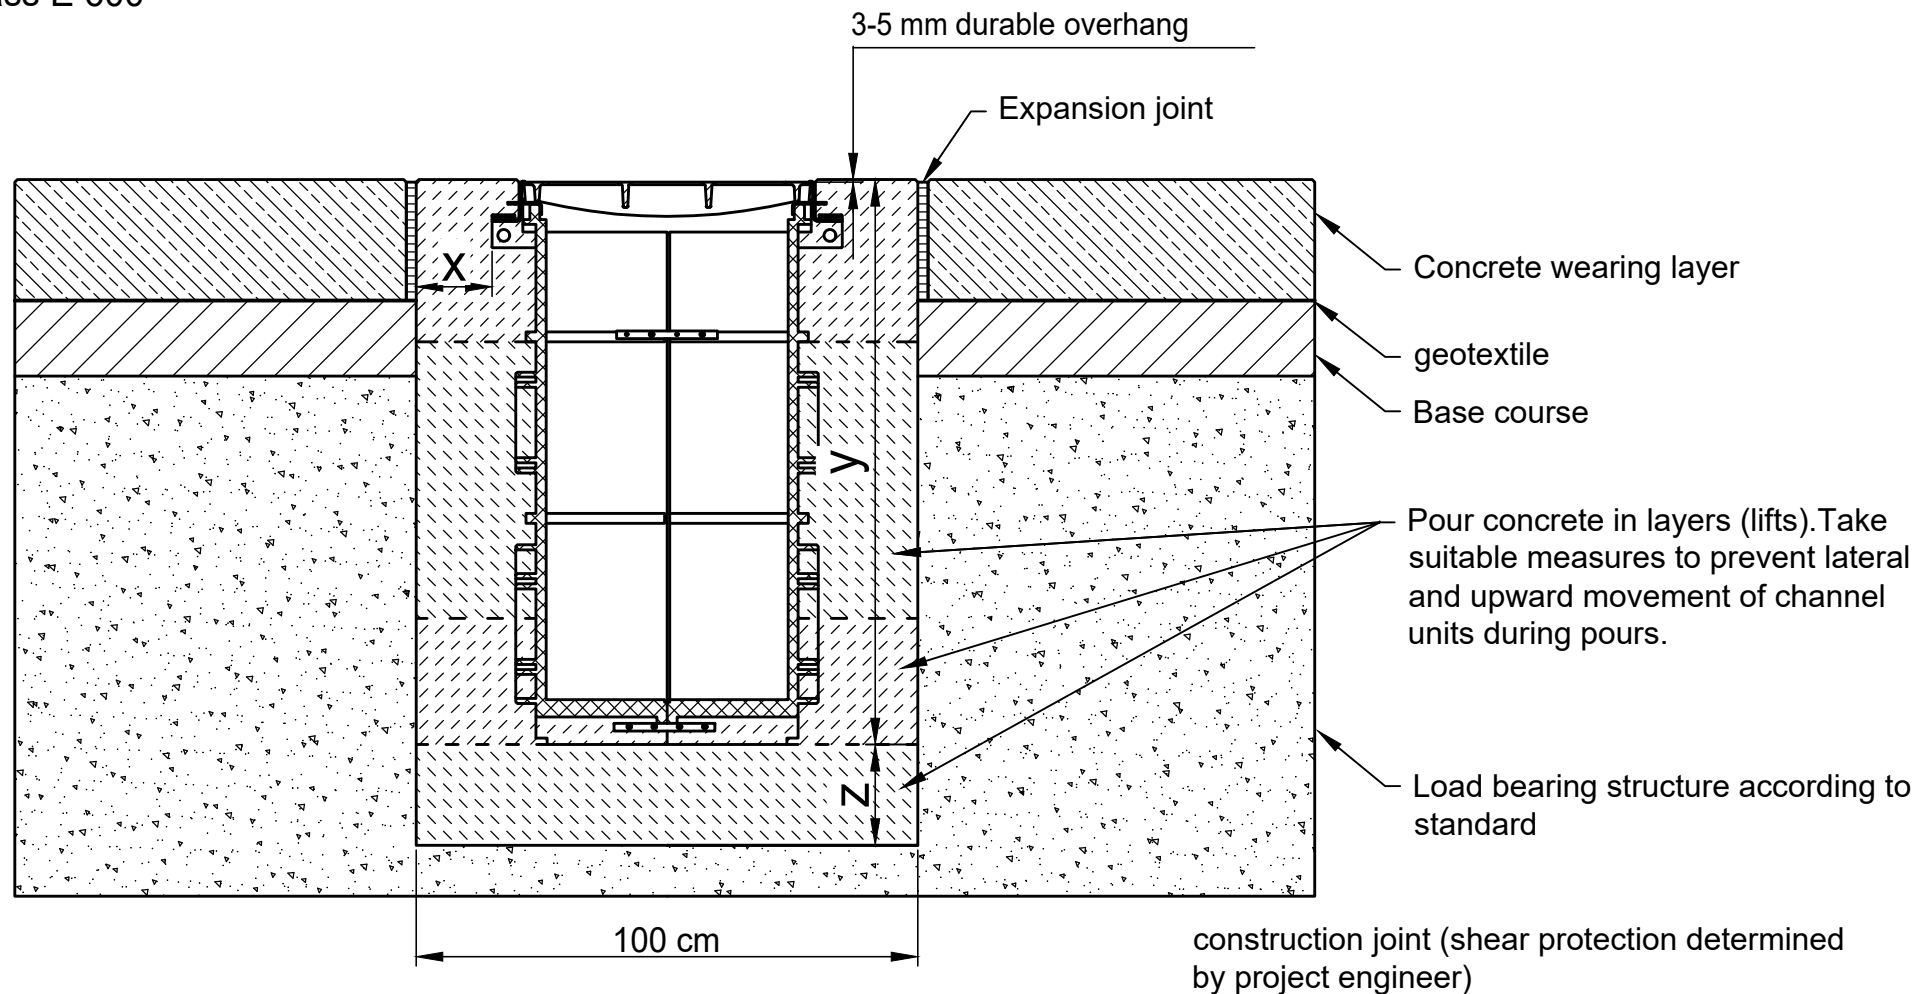

Unit 4, Frenchs Avenue  
LU6 1BH Dunstable / Bedfordshire  
United Kingdom

Tel. +44 1582 501380  
TS-UK@hauraton.com