



Installation Example
in asphalted areas Class D 400

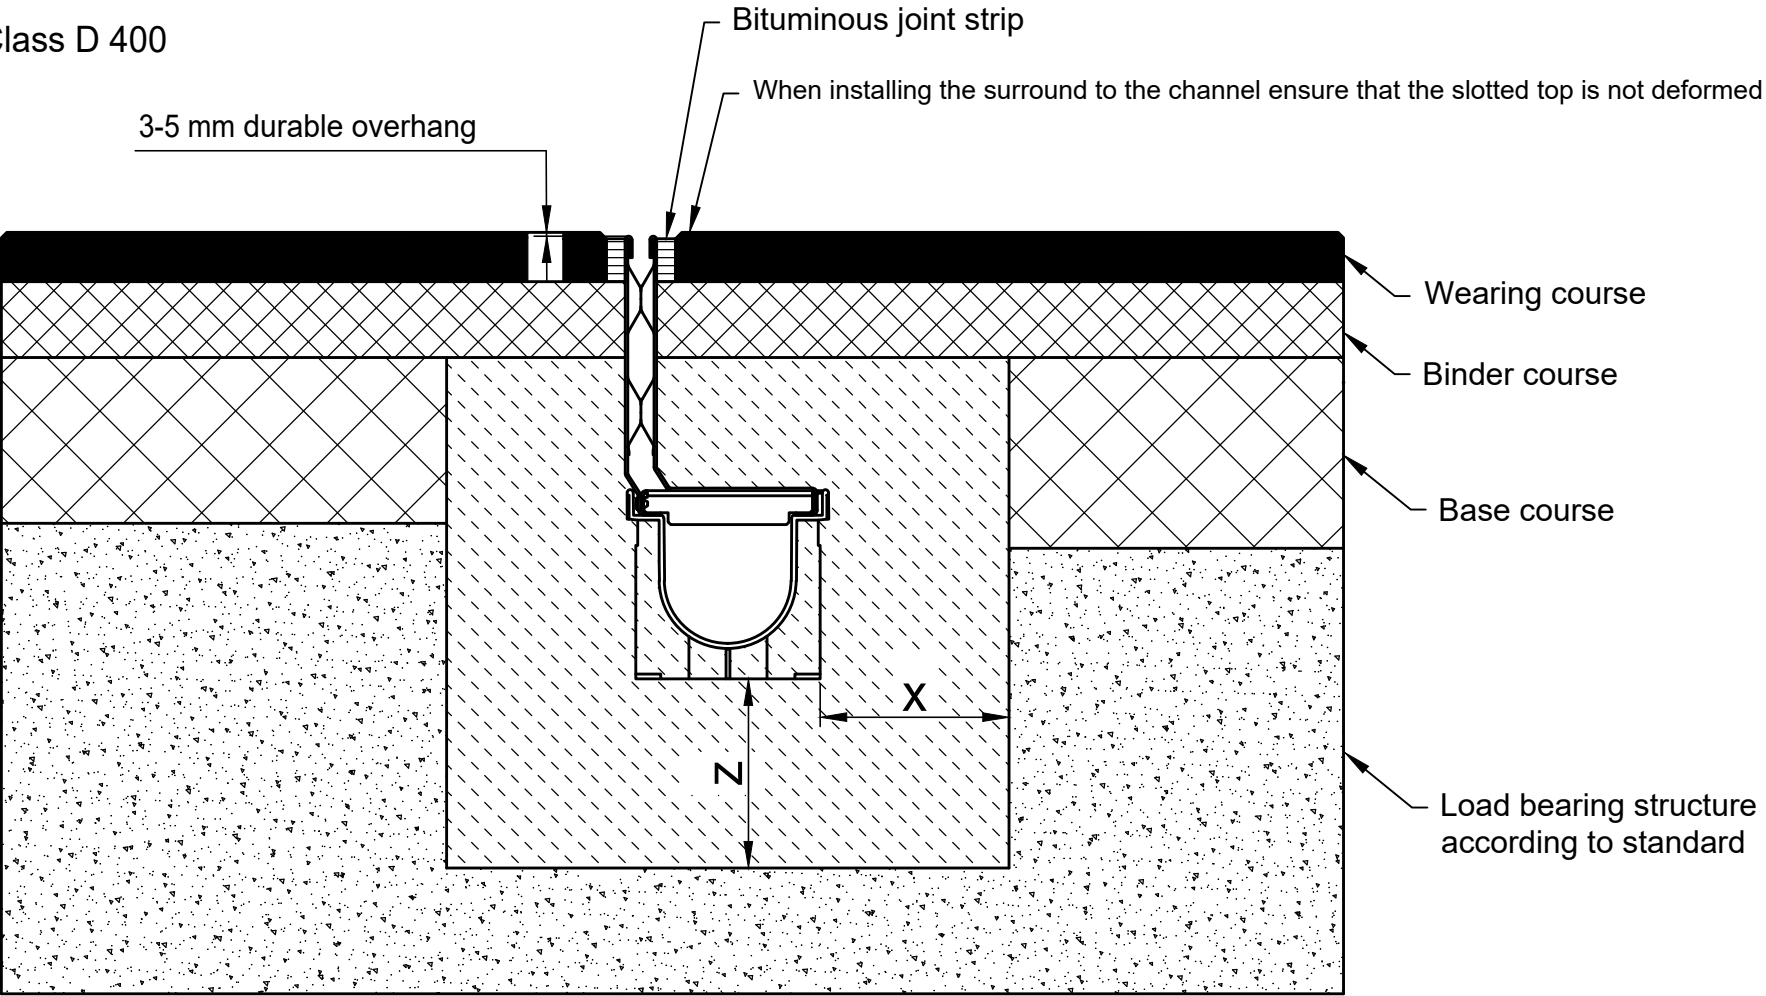

* y = Channel height + 2 cm

Category according to EN 1433 / DIN 19580		A 15	B 125	C 250	D 400**	E 600**	F 900**	Applying to following systems: RECYFIX Paverslot channel 100, 150, 200 FASERFIX Paverslot channel 100, 150, 200	
Foundation: width x / height y / thickness z (in cm)					15 / * / 15				
EN 206-1 / DIN 1045-2	quality of concrete stretcher								
	without danger of frost on the lateral support				C25/30 X0				
The named concrete quality is a minimum quality					C25/30 XF3				
The installation examples / advise constantly are adapted to the technical conditions. With new editions older expenditures lose their validity. Before planning or installation please verify the current version at www.hauraton.com In building construction is a sealing layer below the channels necessary. The installation represents a proven recommendation from HAURATON. The final responsibility for the execution lies with the planner in charge. Specific conditions of the project must be taken into account. ** Installation situations of drainage systems with high dynamic loads (e.g. airports, motorways and manoeuvring areas of buses, lorries and forklifts, etc.) are not sufficiently considered in DIN EN 1433. Please contact us for such applications to work out project-specific solutions.		Date:		17.01.2023		Our general installation instructions apply.		Format DIN	A4
								scale	1:6
				0000125101_BRITISH.dwg		6		EBBw	
						RF-PRO-100-RiMSzAbd Typ 01 HH200 vz Einbaubeispiel Klasse D 400 in Asphalt			
								 Unit 4, Frenchs Avenue LU6 1BH Dunstable / Bedfordshire United Kingdom Tel. +44 1582 501380 TS-UK@hauraton.com	